

## Digital pressure gauge Model CPG500



for further approvals see  
page 3

### Applications

- Calibration service companies and service industry
- Measurement and control laboratories
- Quality assurance
- Easy on-site calibration

### Special features

- Measuring ranges from -1 ... +16 bar to 0 ... 1,000 bar (-14.5 ... 230 psi to 0 ... 14,500 psi)
- Accuracy: 0.25 % (incl. calibration certificate)
- Robust case with protective rubber cap
- Simple operation using four buttons
- Complete service cases incl. pressure generation available



Digital pressure gauge model CPG500

## Description

### General information

The model CPG500 digital pressure gauge enables the measurement and display of pressure values in a single instrument. The accuracy of digital measurement technology and the simplicity of an analogue gauge are combined in this instrument.

### Accuracy

The CPG500 offers an accuracy of 0.25 % of span in eight pressure measuring ranges. Readings can be displayed in one of five standard units.

### Sampling rate

With a measuring rate of 100 measurements per second, the CPG500 features a very high measuring rate. With this, fast pressure peaks and drops in pressure can be detected. The bar graph display and drag pointer function integrated into the display, as well as retrievable MIN/MAX peak values, enable effective analysis of the measuring point.

### Features

In order to prolong the battery life, the CPG500 features an automatic switch-off function. With the ZERO function, the display value can be zeroed with the simple press of a button. An activatable filter function stabilises pressures which fluctuate strongly, and enables the pressure value to be read easily.

### Complete test and service cases

For maintenance and service applications, various case systems are available. Service cases with pneumatic or hydraulic pressure generation are available.

### Certified accuracy

For each digital pressure gauge, the accuracy is certified by a factory calibration certificate which accompanies the instrument. On request, a DKD/DAkkS calibration certificate will be provided for this instrument.

## Specifications Model CPG500







Sensor technology				
<b>Measuring range</b>	<b>-1 ... +16 bar</b>			
Resolution	0.001			
<b>Measuring range</b>	<b>-1 ... +20 bar</b>	<b>-1 ... +40 bar</b>	<b>0 ... 60 bar</b>	<b>0 ... 100 bar</b>
Resolution	0.01			
<b>Measuring range</b>	<b>0 ... 350 bar</b>	<b>0 ... 700 bar</b>	<b>0 ... 1,000 bar</b>	
Resolution	0.1			
<b>Measuring range</b>	<b>-14,5 ... 230 psi</b>			
Resolution	0.001			
<b>Measuring range</b>	<b>-14,5 ... 290 psi</b>	<b>-14,5 ... 580 psi</b>	<b>0 ... 870 psi</b>	<b>0 ... 1,540 psi</b>
Resolution	0.01			
<b>Measuring range</b>	<b>0 ... 5,000 psi</b>	<b>0 ... 10,000 psi</b>	<b>0 ... 14,500 psi</b>	
Resolution	0.1			
<b>Overload safety</b>	3 times; < 25 bar (< 360 psi) 2 times; > 25 bar ... ≤ 600 bar (> 360 psi ... ≤ 8,700 psi) 1.5 times; > 600 bar (> 8,700 psi)			
<b>Pressure connection</b>	G ¼ up to a max. 40 bar (580 psi) G ½ from > 40 bar (> 580 psi)			
<b>Accuracy</b>	0.25 % FS ±1 digit			

Base instrument	
<b>Indicator</b>	
Display	4 ½ digit, bar graph with drag pointer function, illuminated
Digit height	15 mm (0.59 in)
Rotatable case	> 270 °
Dimensions	50 x 34 mm (1.97 x 1.34 in)
Pressure units	bar, psi, MPa, kPa, kg/cm <sup>2</sup>
<b>Functions</b>	
Measuring rate	10 ms
Memory	MIN/MAX
Autopower	Selectable
Zero function	Zero point adjustment
Reset	Delete MIN/MAX value
<b>Material</b>	
Wetted parts <sup>1)</sup>	Stainless steel with sealing NBR
Case	Die-cast zinc with TPE protective rubber cap
<b>Voltage supply</b>	
Power supply	2 x 1.5 V AA batteries
Battery life	approx. 1,500 hrs.
Battery status display	Icon in display
<b>Permissible ambient conditions</b>	
Operating temperature	-10 ... +50 °C (14 ... 122 °F)
Medium temperature	-20 ... +80 °C (-4 ... +176 °F)
Storage temperature	-20 ... +60 °C (-4 ... +140 °F)
Relative humidity	< 85 % r. h. (non-condensing)

1) Only for use with safe media per directive 67/548/EEC (article 2, paragraph 2).

Base instrument	
<b>Case</b>	
Dimensions	79 x 79 x 33 mm (3.11 x 3.11 x 1.30 in)
Ingress protection	IP67
Weight	approx. 400 g (0.882 lbs)

## Approvals


Logo	Description	Country
	<b>EU declaration of conformity</b> <ul style="list-style-type: none"> <li>■ EMC directive</li> <li>EN 61326 emission (group 1, class B) and interference immunity (industrial application)</li> <li>■ Pressure equipment directive</li> <li>■ RoHS conformity</li> </ul>	European Union
	<b>EAC</b> <ul style="list-style-type: none"> <li>■ EMC directive</li> <li>■ Pressure equipment directive</li> </ul>	Eurasian Economic Community
-	<b>MTSCHS</b> Permission for commissioning	Kazakhstan
	<b>KazInMetr</b> Metrology, measurement technology	Kazakhstan
	<b>BelGIM</b> Metrology, measurement technology	Belarus
	<b>UkrSEPRO</b> Metrology, measurement technology	Ukraine
	<b>Uzstandard</b> Metrology, measurement technology	Uzbekistan

## Certificates

Certificate	
<b>Calibration</b>	Standard: 3.1 calibration certificate per DIN EN 10204 Option: DKD/DAkKS calibration certificate
<b>Recommended recalibration interval</b>	1 year (dependent on conditions of use)


Approvals and certificates, see website

## Dimensions in mm (in)

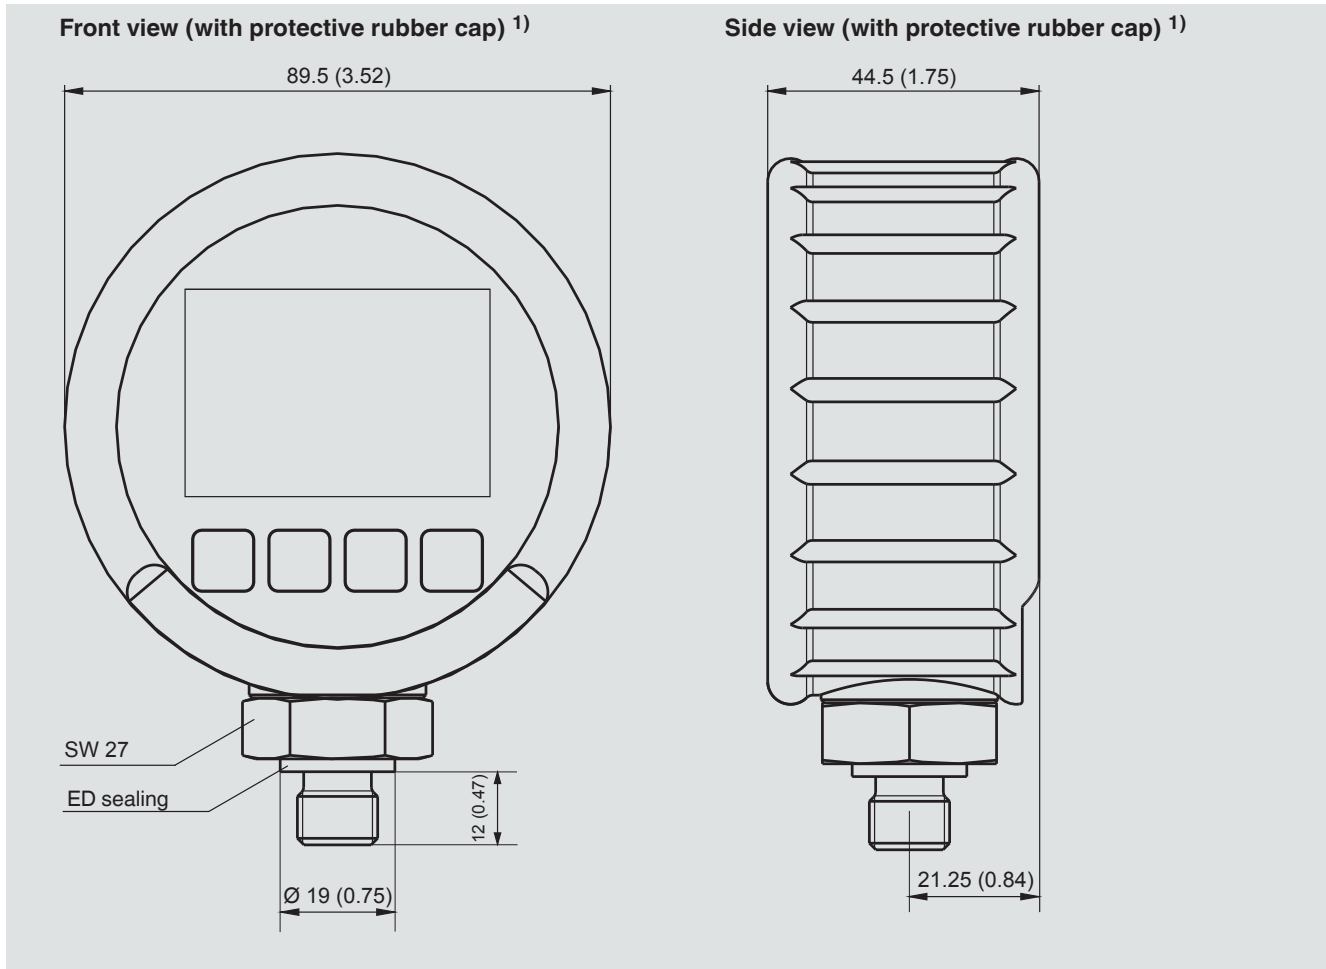

1) Drawing with G ¼ pressure connection

## Front foil

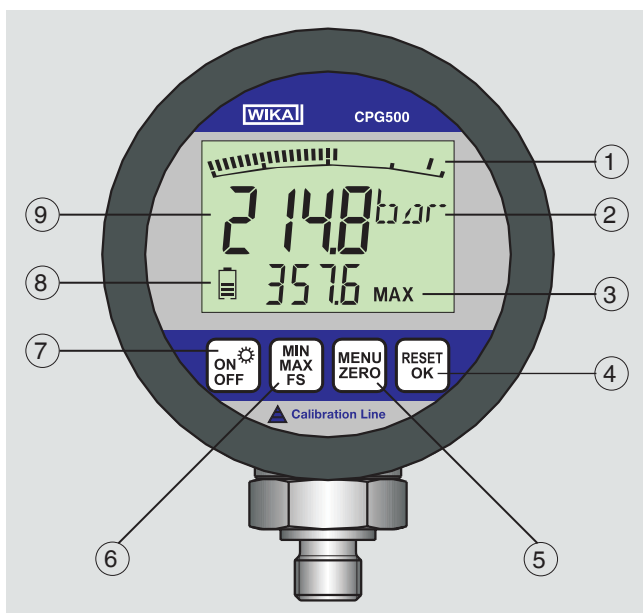

- ① Bar graph indicates the current pressure graphically
- ② Currently set unit
- ③ Display of the measuring range or the MIN/MAX value
- ④ Clear the MIN/MAX values  
Confirmation function in the menu
- ⑤ Hold down to access the menu  
Zero point adjustment carried out by simply pressing
- ⑥ Change display value to MIN/MAX or FS (Full Scale)
- ⑦ With a single press, switch the digital pressure gauge on/off  
Press for a while in order to switch the backlighting on
- ⑧ Battery status
- ⑨ Pressure indication

## Complete test and service cases



**Basic version incl. pneumatic pressure generation**

Calibration case with model CPG500 digital pressure gauge and model CPP40 hand test pump, for pressures -0.95 ... +40 bar (13.8 ... 580 psi), consisting of:

- Plastic service case with foam insert
- Digital pressure gauge model CPG500
- Pneumatic hand test pump model CPP40; -0.95 ... +40 bar (13.8 ... 580 psi)

Available measuring ranges see specifications



**Basic version incl. hydraulic pressure generation**

Calibration case with model CPG500 digital pressure gauge and model CPP700-H or CPP1000-H hand test pumps, for pressures 0 ... 700 bar (0 ... 10,000 psi) or 0 ... 1,000 bar (0 ... 14,500 psi), consisting of:

- Plastic service case with foam insert
- Digital pressure gauge model CPG500
- Hydraulic hand test pump model CPP700-H or CPP1000-H, 0 ... 700 bar (0 ... 10,000 psi) or 0 ... 1,000 bar (0 ... 14,500 psi)

Available measuring ranges see specifications

## Recommended pressure generation


### Pneumatic hand test pump model CPP40

**Pressure range:** -0.95 ... +40 bar (13.8 ... 580 psi)



### Model CPP700-H or model CPP1000-H hydraulic hand test pumps

**Pressure range:** 0 ... 700 bar or 0 ... 1,000 bar  
(0 ... 10,000 psi or 0 ... 14,500 psi)



Further specifications see data sheet CT 91.07

## Scope of delivery

- Digital pressure gauge model CPG500
- Operating instructions
- 3.1 calibration certificate per DIN EN 10204
- 2 x AA batteries
- Protective rubber cap for case

## Option

- DKD/DAkkS certified accuracy

## Accessories

### Connection adapters

- Various pressure adapters

### Pressure generation

- Pneumatic test pumps
- Hydraulic test pumps

### Test case

- Various calibration cases incl. pressure generation